



ENERG
енергия · ενεργεια




–weishaupt–

WSB 6-A-RME-AI



55 °C

35 °C

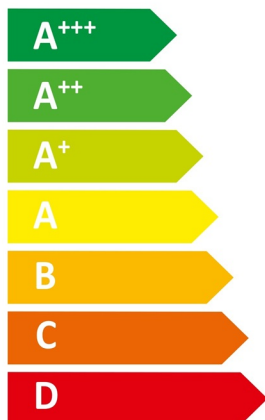

A⁺⁺

A⁺⁺⁺



0 dB



54 dB

■ 6
■ 5
■ 5
kW

■ 6
■ 6
■ 5
kW



2019

811/2013

Produktdaten

Anbieter: **Max Weishaupt SE**
Max-Weishaupt-Straße
D-88475 Schwendi

Produkt: **Wärmeerzeuger** **WSB 6-A-RME-AI**

Die EU-Konformitätserklärung und die Anleitung (manual) liegen dem Produkt bei.

Nachstehende Produktdaten wurden auf Basis folgender Prüfgrundlagen ermittelt:

811/2013/EU, 813/2013/EU, EN 12102:2017, EN 14511:2018, EN 14825:2018

	Temperaturanwendung		
	35°C	55°C	
Wärmeerzeuger	WSB 6-A-RME-AI		
Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz (A+++ - D)	A+++	A++	
Wärmenennleistung bei durchschnittlichen Klimaverhältnissen	6	5	kW
Jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	192	125	%
Jährlicher Energieverbrauch als Endenergie für Raumheizung bei durchschnittlichen Klimaverhältnissen	2331	3226	kWh
Schallleistungspegel im Gebäude, LWA	0		dB(A)
Besondere Vorkehrungen bei der Installation	siehe manual		
Wärmenennleistung bei kälteren Klimaverhältnissen	6	6	kW
Wärmenennleistung bei wärmeren Klimaverhältnissen	5	5	kW
Jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälteren Klimaverhältnissen	153	107	%
Jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen	235	152	%
Jährlicher Energieverbrauch für Raumheizung als Endenergie bei kälteren Klimaverhältnissen	3795	4937	kWh
Jährlicher Energieverbrauch für Raumheizung als Endenergie bei wärmeren Klimaverhältnissen	1121	1650	kWh
Schallleistungspegel im Freien, LWA	54		dB(A)

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WSB 6-A-RME-AI
	Air-to-water heat pump
Low-temperature heat pump:	Nein
Equipped with a supplementary heater:	Ja
Heat pump combination heater:	Nein
Application:	low
Climate:	average

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}	4,9	kW
T _j = +2°C	P _{dh}	3,0	kW
T _j = +7°C	P _{dh}	1,9	kW
T _j = +12°C	P _{dh}	2,2	kW
T _j = bivalent temperature	P _{dh}	4,9	kW
T _j = operation limit temperature	P _{dh}	4,4	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}		kW
Bivalent temperature	T _{biv}	-7	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	192	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d	3,21	
T _j = +2°C	COP _d	4,79	
T _j = +7°C	COP _d	5,99	
T _j = +12°C	COP _d	8,30	
T _j = bivalent temperature	COP _d	3,21	
T _j = operation limit temperature	COP _d	2,93	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d		
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Heating water operating limit temperature	WTOL	60	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	1,00
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	1,00
T _j = +12°C	C _{dh}	0,99
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,012	kW
Thermostat-off mode	P _{TO}	0,004	kW
Standby mode	P _{SB}	0,014	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	0 / 54	dB
Annual energy consumption	Q _{HE}	2.331	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}		kW
Type of energy input	Electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--	2.200	m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--		m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WSB 6-A-RME-AI
	Air-to-water heat pump
Low-temperature heat pump:	Nein
Equipped with a supplementary heater:	Ja
Heat pump combination heater:	Nein
Application:	medium
Climate:	average

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}	4,1	kW
T _j = +2°C	P _{dh}	2,6	kW
T _j = +7°C	P _{dh}	4,5	kW
T _j = +12°C	P _{dh}	1,8	kW
T _j = bivalent temperature	P _{dh}	4,1	kW
T _j = operation limit temperature	P _{dh}	3,1	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}		kW
Bivalent temperature	T _{biv}	-7	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	125	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d	2,00	
T _j = +2°C	COP _d	3,12	
T _j = +7°C	COP _d	4,44	
T _j = +12°C	COP _d	4,98	
T _j = bivalent temperature	COP _d	2,00	
T _j = operation limit temperature	COP _d	1,48	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d		
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Heating water operating limit temperature	WTOL	60	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	1,00
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	0,99
T _j = +12°C	C _{dh}	0,98
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,012	kW
Thermostat-off mode	P _{TO}	0,004	kW
Standby mode	P _{SB}	0,015	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	0 / 54	dB
Annual energy consumption	Q _{HE}	3.226	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}		kW
Type of energy input	Electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--	2.200	m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--		m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.