



ENERG
енергия · ενεργεια




Company

Street

City

Weishaupt WWP S 18 ID



A⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺⁺

A⁺

A

B

C


D

E

F

G

+



+



+



+



2015

811/2013

Jahreszeitbedingte Raumheizungs-Energieeffizienz der Wärmepumpe

140 %

Temperaturregler

Vom Datenblatt für
Temperaturregelung

Klasse I = 1 %, Klasse II = 2 %, Klasse III = 1,5 %,
Klasse IV = 2 %, Klasse V = 3 %, Klasse VI = 4 %,
Klasse VII = 3,5 %, Klasse VIII = 5 %

+ **1,5** %

Zusatzheizkessel

Jahreszeitbedingte Raumheizungs-Energieeffizienz (in %)

Vom Datenblatt des Heizkessels

(**0** - 140) x 0 = ± **0** %

Solarer Beitrag

Vom Datenblatt der Solareinrichtung

Kollektor-Größe (in m²)

Tankvolumen (in m³)

Kollektor-Wirkungsgrad
(in %)


Tankeinstufung
A⁺ = 0,95, A = 0,91,
B = 0,86, C = 0,83,
D-G = 0,81

(0 x **0** + 0 x **0**) x 0,45 x (**0** / 100) x **0** = + **0** %

Jahreszeitbedingte Raumheizungs-Energieeffizienz der Verbundanlage bei durchschnittlichem Klima

142 %

Jahreszeitbedingte Raumheizungs-Energieeffizienzklasse der Verbundanlage bei durchschnittlichem Klima

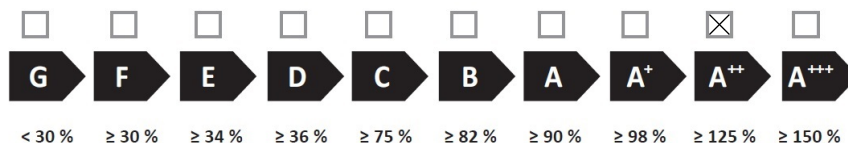

Jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälterem und wärmerem Klima

Kälter: **142** - 5 = **147** % Wärmer: **142** + 1 = **143** %

Die auf diesem Datenblatt für den Produktverbund angegebene Energieeffizienz weicht möglicherweise von der Energieeffizienz nach dessen Einbau in ein Gebäude ab, denn diese wird von weiteren Faktoren wie dem Wärmeverlust im Verteilungssystem und der Dimensionierung der Produkte im Verhältnis zu Größe und Eigenschaften des Gebäudes beeinflusst.



ENERG
енергия · ενεργεια




–weishaupt–

WWP S 18 ID



55 °C

35 °C

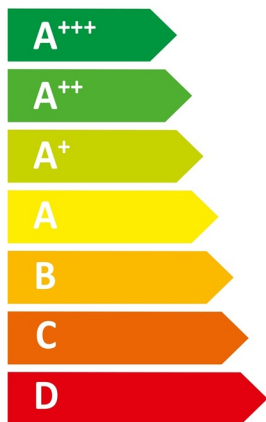

A⁺⁺

A⁺⁺⁺



50 dB



0 dB

■ 18
■ 17
■ 17
kW

■ 19
■ 18
■ 18
kW



2019

811/2013

Produktdaten

Anbieter: **Max Weishaupt SE**
Max-Weishaupt-Straße
D-88475 Schwendi

Produkt: **Wärmeerzeuger** **WWP S 18 ID**

Die EU-Konformitätserklärung und die Anleitung (manual) liegen dem Produkt bei.

Nachstehende Produktdaten wurden auf Basis folgender Prüfgrundlagen ermittelt:

811/2013/EU, 813/2013/EU, EN 12102:2008, EN 14511-1:2007, EN 14511-2:2007, EN 14511-3:2007+AC:2008,
 EN 14511-4:2007, EN 14825:2013

	Temperaturanwendung		
	35°C	55°C	
Wärmeerzeuger	WWP S 18 ID		
Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz (A+++ - D)	A+++	A++	
Wärmenennleistung bei durchschnittlichen Klimaverhältnissen	18	17	kW
Jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	196	140	%
Jährlicher Energieverbrauch als Endenergie für Raumheizung bei durchschnittlichen Klimaverhältnissen	7077	9200	kWh
Schallleistungspegel im Gebäude, LWA	50		dB(A)
Besondere Vorkehrungen bei der Installation	siehe manual		
Wärmenennleistung bei kälteren Klimaverhältnissen	19	18	kW
Wärmenennleistung bei wärmeren Klimaverhältnissen	18	17	kW
Jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälteren Klimaverhältnissen	204	145	%
Jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen	198	141	%
Jährlicher Energieverbrauch für Raumheizung als Endenergie bei kälteren Klimaverhältnissen	8630	11.279	kWh
Jährlicher Energieverbrauch für Raumheizung als Endenergie bei wärmeren Klimaverhältnissen	4551	5925	kWh
Schallleistungspegel im Freien, LWA	0		dB(A)
Modellkennung der Regelung	WPM 5.0		
Klasse des Temperaturreglers	III		
Beitrag des Reglers zur jahreszeitbedingten Raumheizungs-Energieeffizienz	1,5		%
Jahreszeitbedingte Raumheizungs-Energieeffizienz der Verbundanlage, eta s	142		%
Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz der Verbundanlage (A+++ - G)	A++		

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WWP S 18 ID
	Brine - to-water heat pump
Low-temperature heat pump:	no
Equipped with a supplementary heater:	no
Heat pump combination heater:	no
Application:	low
Climate:	average

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	18	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}	17,5	kW
T _j = +2°C	P _{dh}	17,6	kW
T _j = +7°C	P _{dh}	17,7	kW
T _j = +12°C	P _{dh}	17,8	kW
T _j = bivalent temperature	P _{dh}	17,5	kW
T _j = operation limit temperature	P _{dh}	17,5	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}		kW
Bivalent temperature	T _{biv}	-10	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	196	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d	4,76	
T _j = +2°C	COP _d	5,10	
T _j = +7°C	COP _d	5,43	
T _j = +12°C	COP _d	5,82	
T _j = bivalent temperature	COP _d	4,70	
T _j = operation limit temperature	COP _d	4,70	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d		
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Heating water operating limit temperature	WTOL	62	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	1,00
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	1,00
T _j = +12°C	C _{dh}	1,00
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,015	kW
Thermostat-off mode	P _{TO}	0,020	kW
Standby mode	P _{SB}	0,015	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		fixed	
Sound power level, indoors/outdoors	L _{WA}	50 / 0	dB
Annual energy consumption	Q _{HE}	7.077	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}	0,00	kW
Type of energy input	electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--		m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--	4,30	m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WWP S 18 ID
	Brine - to-water heat pump
Low-temperature heat pump:	no
Equipped with a supplementary heater:	no
Heat pump combination heater:	no
Application:	medium
Climate:	average

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	17	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}	16,6	kW
T _j = +2°C	P _{dh}	17,0	kW
T _j = +7°C	P _{dh}	17,3	kW
T _j = +12°C	P _{dh}	17,5	kW
T _j = bivalent temperature	P _{dh}	16,5	kW
T _j = operation limit temperature	P _{dh}	16,5	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}		kW
Bivalent temperature	T _{biv}	-10	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	140	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d	3,05	
T _j = +2°C	COP _d	3,66	
T _j = +7°C	COP _d	4,15	
T _j = +12°C	COP _d	4,77	
T _j = bivalent temperature	COP _d	2,90	
T _j = operation limit temperature	COP _d	2,90	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d		
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Heating water operating limit temperature	WTOL	62	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	1,00
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	1,00
T _j = +12°C	C _{dh}	1,00
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,015	kW
Thermostat-off mode	P _{TO}	0,020	kW
Standby mode	P _{SB}	0,015	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		fixed	
Sound power level, indoors/outdoors	L _{WA}	50 / 0	dB
Annual energy consumption	Q _{HE}	9.200	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}	0,00	kW
Type of energy input	electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--		m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--	4,30	m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WWP S 18 ID
	Brine - to-water heat pump
Low-temperature heat pump:	no
Equipped with a supplementary heater:	no
Heat pump combination heater:	no
Application:	low
Climate:	colder

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	19	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}	17,7	kW
T _j = +2°C	P _{dh}	17,7	kW
T _j = +7°C	P _{dh}	17,8	kW
T _j = +12°C	P _{dh}	17,8	kW
T _j = bivalent temperature	P _{dh}	17,5	kW
T _j = operation limit temperature	P _{dh}	17,5	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}	17,6	kW
Bivalent temperature	T _{biv}	-20	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	204	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d	5,18	
T _j = +2°C	COP _d	5,47	
T _j = +7°C	COP _d	5,72	
T _j = +12°C	COP _d	5,77	
T _j = bivalent temperature	COP _d	4,82	
T _j = operation limit temperature	COP _d	4,70	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d	5,03	
For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Heating water operating limit temperature	WTOL	62	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	1,00
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	1,00
T _j = +12°C	C _{dh}	1,00
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	1,00

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,015	kW
Thermostat-off mode	P _{TO}	0,020	kW
Standby mode	P _{SB}	0,015	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		fixed	
Sound power level, indoors/outdoors	L _{WA}	50 / 0	dB
Annual energy consumption	Q _{HE}	8.630	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}	1,02	kW
Type of energy input	electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--		m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--	4,30	m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WWP S 18 ID
	Brine - to-water heat pump
Low-temperature heat pump:	no
Equipped with a supplementary heater:	no
Heat pump combination heater:	no
Application:	medium
Climate:	colder

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	18	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}	17,0	kW
T _j = +2°C	P _{dh}	17,2	kW
T _j = +7°C	P _{dh}	17,4	kW
T _j = +12°C	P _{dh}	17,6	kW
T _j = bivalent temperature	P _{dh}	16,6	kW
T _j = operation limit temperature	P _{dh}	16,5	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}	16,8	kW
Bivalent temperature	T _{biv}	-20	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	145	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d	3,54	
T _j = +2°C	COP _d	4,07	
T _j = +7°C	COP _d	4,57	
T _j = +12°C	COP _d	5,03	
T _j = bivalent temperature	COP _d	3,01	
T _j = operation limit temperature	COP _d	2,90	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d	3,24	
For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Heating water operating limit temperature	WTOL	62	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	1,00
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	1,00
T _j = +12°C	C _{dh}	1,00
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	1,00

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,015	kW
Thermostat-off mode	P _{TO}	0,020	kW
Standby mode	P _{SB}	0,015	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		fixed	
Sound power level, indoors/outdoors	L _{WA}	50 / 0	dB
Annual energy consumption	Q _{HE}	11.279	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}	1,01	kW
Type of energy input	electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--		m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--	4,30	m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WWP S 18 ID
	Brine - to-water heat pump
Low-temperature heat pump:	no
Equipped with a supplementary heater:	no
Heat pump combination heater:	no
Application:	low
Climate:	warmer

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	18	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}		kW
T _j = +2°C	P _{dh}	17,5	kW
T _j = +7°C	P _{dh}	17,6	kW
T _j = +12°C	P _{dh}	17,8	kW
T _j = bivalent temperature	P _{dh}	17,5	kW
T _j = operation limit temperature	P _{dh}	17,5	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}		kW
Bivalent temperature	T _{biv}	2	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	198	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d		
T _j = +2°C	COP _d	4,70	
T _j = +7°C	COP _d	5,02	
T _j = +12°C	COP _d	5,56	
T _j = bivalent temperature	COP _d	4,70	
T _j = operation limit temperature	COP _d	4,70	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d		
For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Heating water operating limit temperature	WTOL	62	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	1,00
T _j = +12°C	C _{dh}	1,00
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,015	kW
Thermostat-off mode	P _{TO}	0,020	kW
Standby mode	P _{SB}	0,015	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		fixed	
Sound power level, indoors/outdoors	L _{WA}	50 / 0	dB
Annual energy consumption	Q _{HE}	4.551	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}	0,00	kW
Type of energy input	electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--		m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--	4,30	m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt SE
Model:	WWP S 18 ID
	Brine - to-water heat pump
Low-temperature heat pump:	no
Equipped with a supplementary heater:	no
Heat pump combination heater:	no
Application:	medium
Climate:	warmer

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	17	kW
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	P _{dh}		kW
T _j = +2°C	P _{dh}	16,5	kW
T _j = +7°C	P _{dh}	16,9	kW
T _j = +12°C	P _{dh}	17,4	kW
T _j = bivalent temperature	P _{dh}	16,5	kW
T _j = operation limit temperature	P _{dh}	16,5	kW
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	P _{dh}		kW
Bivalent temperature	T _{biv}	2	°C

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	141	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20°C and outdoor temperature T _j			
T _j = -7°C	COP _d		
T _j = +2°C	COP _d	2,90	
T _j = +7°C	COP _d	3,38	
T _j = +12°C	COP _d	4,34	
T _j = bivalent temperature	COP _d	2,90	
T _j = operation limit temperature	COP _d	2,90	
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	COP _d		
For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Heating water operating limit temperature	WTOL	62	°C

Item	Symbol	Value
Degradation co-efficient (**)	C _{dh}	
T _j = -7°C	C _{dh}	
T _j = +2°C	C _{dh}	1,00
T _j = +7°C	C _{dh}	1,00
T _j = +12°C	C _{dh}	1,00
For air-to-water heat pumps: T _j = -15°C (if TOL < -20°C)	C _{dh}	

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,015	kW
Thermostat-off mode	P _{TO}	0,020	kW
Standby mode	P _{SB}	0,015	kW
Crankcase heater mode	P _{CK}	0,000	kW

Other items

Capacity control		fixed	
Sound power level, indoors/outdoors	L _{WA}	50 / 0	dB
Annual energy consumption	Q _{HE}	5.925	kWh

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Supplementary heater

Rated heat output (*)	P _{sup}	0,00	kW
Type of energy input	electricity		

For air-to-water heat pumps: Rated air flow rate, outdoors	--		m³/h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--	4,30	m³/h

Water heating energy efficiency	η _{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt SE, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.